

YAZGUR, R. -

25496 BEZNICHENKO, I. i YAZGUR, R. Proverka pravil'nosti vyplaty premiy (na promyshlenn ykh predpriyatiyakh). Vestnik Gos. knotrolya, 1948, No. 5, s. 38 - 45.

SO: Letopis' Zhurnal Statey, No. 30, Moscow, 1948

Reznichenko, I. and Yazgur, R. - "Checking accounts for the cost price of products of industrial concerns," Vestnik Gos. kontrolya, 1948, No. 11, p. 33-44

SO: U-3600, 10 July 53, (Letopis 'Zhurnal 'nykh Statey, No. 6, 1949).

YAZGUR, N. Ye.

MALKIN, Ye. N.; YAZGUR, N. Ye.

[Journal-voucher form of bookkeeping in cooperative production artels].
Zhurnal'no-ordernaia forma schetovodstva v arteliakh promyslovoi koo-
peratsii. Moskva, KOIZ, 1954. 134 p. (MIRA 8:3D)

~~YAZHUR, R.~~

Original documents in accounting for output and computing wages.
Bukhg.uchet 16 no.2:29-32 F '57. (MLRA 10:2)

1. Nachal'nik otdela organizatsii i mekhanizatsii ucheta.
(Wages--Accounting)

YAZGUR, Ya.I.

Stages of infectious psychoses and changes in the urine connected with their neurodynamics. Vop. psikh. i nevr. no.1:125-132 '57 (MIRA 11:8)

1. Iz Leningradskoy psikhonevrologicheskoy bol'nitsy im. I.M. Balinskogo.
(URINE--ANALYSIS AND PATHOLOGY)
(PSYCHOSES)

YAZGUR, Ya.I.

Carbohydrate metabolism as an indication of the functional state
of the cerebral cortex in mental diseases. Vop.psikh. i nevr.
no.1:133-137 '57 (MIRA 11:8)

1. Iz Leningradskey psikhonevrologicheskoy bol'nitsy im. I.M.
Balinskogo.

(CEREBRAL CORTEX)
(CARBOHYDRATE METABOLISM)

YAZGUR, Ya.I.

Role of acidosis in the pathogenesis of schizophrenia. Vop.psikh.i
nerv. 8:332-340 '62. (MIRA 17:4)

1. Iz Psichiatricheskoy bol'nitsy imeni Balinskogo, Leningrad.

YAZGUR, Ya.I.

Psychosis in lupus erythematosus disseminatus. Zhur.
nervr. i. psikh. 65 no.3:438-440 '65. (MIRA 18:4)

1. Psikhonevrologicheskaya bol'nitsa im. Balinskogo (glavnyy
vrach S.N. Popova, nauchnyy rukovoditel'- prof. I.F. Sluchevskiy),
Leningrad.

MOSININ, Ye., doktor tekhn.nauk; YAZHAKOV, M.M., inzh.

Bonding cone-shaped sheet parts in roller machines.
Vost.mashinostr. 45 no.11:53-56 H '65.

(MIRA 18:12)

SHTUKOVSKAYA, L.A.; YAZHEMSKAYA, V.Ya.

Polarographic method in sanitary water examination. Gig.i san.
26 no.3:55-57 Mr '61. (MIRA 14:7)

1. Iz Moskovskogo nauchno-issledovatel'skogo instituta gigiyeny
imeni F.F.Erismana Ministerstva zdravookhraneniya RSFSR.
(WATER-ANALYSIS) (POLAROGRAPHY)

Country : YUGOSLAVIA
 Category : Farm Animals. Cattle. Q
 Abs. Jour : Ref Zhur-Biol., No 21, 1958, 96876
 Author : Yazhev, V.
 Institut. : -
 Title : The Raising of Calves of Tuberculous Parents
 According to the Method of Bang.
 Orig Pub. : Veterin. glasnik, 1957, 11, No 1, 51-53
 Abstract : In 1948, a group of cows and one bull of the Oberinthal breed were imported into the country. These animals were placed into the same cowshed with cows of a local breed. In 1952, it was found that 70 percent of the cattle - native and imported - reacted positively to tuberculin. After the calves which originated from these cows were nursed with colostrum, they were isolated by being placed into separate premises and fed boiled fresh milk from the infected cows to which cod-liver oil was added. Each calf received 8 l of milk daily.
 Card: 1/3

Country : YUGOSLAVIA
 Category : Farm Animals.
 Cattle. Q

Abs. Jour : Ref Zhur-Biol., No 21, 1958, 96876

Author :
 Institut. :
 Title :

Orig Pub. :

Abstract : Beginning with the age of 3 weeks, they were additionally fed concentrates. The milk was fed to the calves until the age of 6 months.

The windows of the calfshed were open day and night in winter and in summer. During the day the calves were on pasture, at night in the calfshed. Each month all the animals were subjected to tuberculinization at which occasion not one positive and doubtful reaction to tuber-

Card: 2/3

Country : YUGOSLAVIA
Category : Farm Animals.
Cattle.

Q

Abs. Jour : Ref Zhur-Biol., No 21, 1958, 96876

Author :
Institut. :
Title :

Orig Pub. :

Abstract : culin was found to exist.

For the period of 1953-1955, 30 young bulls
and 22 heifers which originated from infected
parents were kept healthy. -- K. M. Lyutikov

Card: 3/3

YAZHEVSKIY, S.

Reducing the pollution of foundry air basins as a factor in
providing safety and growth of labor productivity. Lit.
proizv. no.12:43 D '65. (MIRA 18:12)

YAZHOUNOVICH, P.

KOLOKOLOV, N., brigadir kirpichnogo zavoda; YAZHOUNOVICH, P., gruzchik;
IVASHEV, Ye., sortirovshchik; KALENIK, I., gruzchik; FLEGENTOV, N.,
sortirovshchik; MATNENKO, G., gruzchik; FEDOSENKO, L., rabotnitsa
kirpichnogo zavoda.

Powerless shop committee. Sov.profssoiuzy 4 no.11:76-77 N '56.
(MIRA 10:1)

(Lumbering)

YAZHGUNOVICH, V.A.

Particular characteristics of the projection of wide films. Tekh.
kino i telev. 4 no.5:80-83 My '60. (MIRA 13:8)
(Motion-picture projection)

GOLIGORSKIY, S.D.; PYTEL', A.Ya.; SHISHOV, I.F.; DZHAVAD-ZADE, M.D.;
RYABINSKIY, V.S.; MEDEL', M.Ye.; YAKUBSON, B.S.; YAZHGUR, F.M.

Reports. Urologia 25 no.1:83-93 Ja-F :60. (MIRA 15:6)
(UROLOGY--ABSTRACTS)

YAZHGUR, F.M.

Calcified dermoid of the urinary bladder. Urologia 28 no.2:
56 Mr-Apr'63. (MIRA 16:6)

1. Iz urologicheskogo otdeleniya (zav. - prof. L.I. Dumayevskiy)
Moskovskoy gorodskoy klinicheskoy bol'nitsy No.6.
(CALCULI, URINARY)

YAZHOV, V.I., aspirant

Comparative effectiveness of antibiotics against pasteurellosis in
ducks. Veterinariia 40 no.9:37-40 S '63. (MIRA 17:1)

1. Vsesoyuznyy institut eksperimental'noy veterinarii.

YAZIK, A.V.

Reversing of a centripetal turbine by means of the nozzle.
Energ. i elektrotekh. prom. no.1:11-12 '62. (MIRA 15:6)

1. Khar'kovskiy politekhnicheskii institut imeni V.I. Lenina.
(Gas turbines)

YAZIK, A.V., inzh.

Experimental centripetal turbine and turboblower. Mashinostroenie
no.1:90-92 Ja-F '62. (MIRA 15:2)

1. Khar'kovskiy politekhnicheskij institut imeni Lenina.
(Turbomachines)

YAZIK, A. V.

New method for manufacturing wheels for an experimental
centripetal turbine. Mashinostroenie no.5:110-111 8-0 '62.
(MIRA 16:1)

(Turbines)

S/096/62/000/009/001/003.
E194/E455

26.2120
AUTHOR: Yazik, A.V., Engineer

TITLE: An experimental study of the influence of the number of runner blades on the efficiency of a centripetal gas turbine

PERIODICAL: Teploenergetika, no.9, 1962, 23-27

TEXT: As there is no general agreement about the optimum number of blades in a centripetal turbine, an experimental study has been made. The energy losses are of four kinds: friction against duct walls, viscosity loss associated with velocity gradient, impact loss due to flow not being directed along duct, and losses due to flow distortion if there are insufficient blades. The optimum number of blades will give the least total loss. A series of tests was made on an experimental air turbine with adjustable pozzle gear. Runners each 125 mm outer diameter were made with 2, 4, 6, 8, 12, 16, 24 and 32 blades. In some of the runners with large numbers of blades half the blades were shortened. The test procedure is described. The runner with 16 blades gave the highest efficiency, invalidating a formula hitherto

Card 1/2

✓B

An experimental study ...

S/096/62/000/009/001/003
E194/E455

recommended for determining the optimum number of blades. Altering the number of blades within the range 10 to 30, using shortened alternate blades when the number exceeds 18 or 20, alters the turbine efficiency by about 5%. In runners with large numbers of blades, losses would be still higher if all the blades were of full length. Given the optimum number of blades, the runners without shortened blades have the highest efficiency. Reduction in the number of blades from 16 to 12 reduced the efficiency by 3%. There are 7 figures. ✓B

ASSOCIATION: Khar'kovskiy politekhnicheskii institut imeni
V.I.Lenina (Khar'kov Polytechnical Institute imeni
V.I.Lenin)

Card 2/2

42759

S/143/62/000/010/002/004
D238/D308

26.2/20
AUTHOR:

Yazik, A.V., Engineer

TITLE:

Experimental investigation of the influence of the number of disc blades on the performance characteristics of a centripetal gas turbine

PERIODICAL:

Izvestiya vysshikh uchebnykh zavedeniy, Energetika, no. 10, 1962, 72-79

TEXT:

Tests were carried out on discs with 2, 4, 6, 8, 12, 16, 24 and 32 blades. The turbine was tested with air in the Reynolds number range $(1.8 - 2.0) \times 10^5$ with Mach number 0.5. It is shown that $2\pi/\tan \alpha_1$ (α_1 being the flow angle) is not the optimum blade number. The author gives and discusses graphs of the dependence of working process parameters, losses at the outlet and in the wheel, outlet flow parameters, effective efficiency, optimum angle of attack and circulation coefficient on the number of blades, as well as of the dependence of various losses, on α_1 . The optimum blade number is 16 irrespective of the magnitude of α_1 . The

Card 1/2

Experimental investigation ...

S/143/62/000/010/002/004
D238/D308

circulation coefficient agrees best with a formula due to Eck. It is more correct to consider the influence of the finite number of blades on the power of a centripetal turbine by introducing an energy loss coefficient for the disc rather than the circulation coefficient. The author mentions V.T. Mitrokhin. There are 6 figures.

ASSOCIATION: Khar'kovskiy politekhnicheskii institut im. V.I. Lenina (Khar'kov Polytechnic Institute im. V.I. Lenin)

SUBMITTED: January 11, 1962

Card 2/2

YAZIK, A.V.

Study of the working process of the turbine of the TK-4 turbocompressor.
Trakt. i sel'khozmaash. 31 [1.e.32] no.11:14-18 N '62. (MIRA 15:12)

1. Khar'kovskiy politekhnicheskii institut imeni V.I.Lenina.
(Diesel engines)

YAZIK, A.V.; KEL'SHTEYN, D.M.

Results of testing the TK-4 turbocompressor on a stand without an engine. Trakt. i sel'khoz mash. 32 no.7:7-9 J1 '62. (MIRA 15:7)

1. Khar'kovskiy politekhnicheskiy institut imeni Lenina.
(Compressors--Testing)

YAZIK, A.V., inzh.

Effect of the magnitude of torque of a centripetal gas turbine
on the number of rotations and α_1 angle. Izv. vys. ucheb. zav.;
energ. 6 no.11:64-69 N'63. (MIRA 17:2)

1. Khar'kovskiy politekhnicheskij institut imeni V.I. Lenina.

YAZIK, A.V., inzh.; KEL'SHTEYN, D.M., inzh.

Studying the TKR-14-2 turbocompressor. Trakt. i sel'khoz mash. 33
no.8:12-14 Ag '63. (MIRA 16:11)

1. Khar'kovskiy politekhnicheskii institut imeni Lenina.

ACCESSION NR: AP4025424

8/0096/64/000/004/0053/0097

AUTHOR: Yasik, A. V. (Engineer)

TITLE: Characteristics of a centrifugal gas turbine with changing angle α

SOURCE: Teploenergetika, no. 4, 1964, 53-57

TOPIC TAGS: centrifugal turbine, centrifugal turbine characteristic, turbocompressor TKR 11, turbocompressor TKR 14, turbine efficiency

ABSTRACT: The characteristics of a centrifugal turbine (125-mm wheel diameter, $\bar{d}_2 = 0.52$, $B_1/d_1 = 0.0088$) previously described by the author ("Mashinostroyeniye," No. 1, 1962) with an inlet nozzle control apparatus were determined experimentally over a wide range of the angle α_1 ($0 - 120^\circ$) using air at $P_0 = 0.5 - 0.8$ bar, $t_0 = 100 - 120^\circ\text{C}$ (which corresponds to $Re_{01} = (2.0 - 2.5) \times 10^5$ and $M_{01} = 0.5 - 0.7$).

Some data were also obtained using turbocompressor wheels of the type TKR-11 (wheel diameter = 110 mm) and TKR-14 ($d_1 = 140$ mm). The experimental characteristics (accuracy better than 1%) are shown in Fig. 1 on the Enclosure. The following results were obtained: a) turbine efficiency remains high only for

Card 1/3

ACCESSION NR: AP4025424

small (3-5°) deviations of α from α_{opt} ; b) changing α_1 over 30° causes small losses in the nozzles and large outlet losses, while further increase in α_1 causes increased losses in the nozzles and small outlet loss changes; c) for $\alpha_1 < 60^\circ$ $\eta = f(\frac{u_1}{C_{ad}})$ is linear for $0 < \frac{u_1}{C_{ad}} < \frac{u_1}{C_{ad}}_{opt}$, while for $\alpha_1 > 60^\circ$ it is linear

over the whole range of u_1/C_{ad} ; d) the moment of the centrifugal turbine ($\eta_{max} \approx 1.7$) is smaller than that of an axial turbine ($\eta_{max} \approx 2.5 - 3.0$); e) η_{max} remains almost constant for $\alpha_1 < 40^\circ$; f) η_{max} is almost independent of the number of turbine buckets. Orig. art. has: 4 formulas and 5 figures.

ASSOCIATION: Fiziko-tekhnicheskii institut niskikh temperatur AN UkrSSR (Physico-technical Low-Temperature Institute, AN UkrSSR)

SUBMITTED: 00

DATE ACQ: 20Apr64

ENCL: 01

SUB CODE: PR

NO REF SOV: 004

OTHER: 001

Cord 2/3

ACCESSION NR: AP4025424

ENCLOSURE: 01

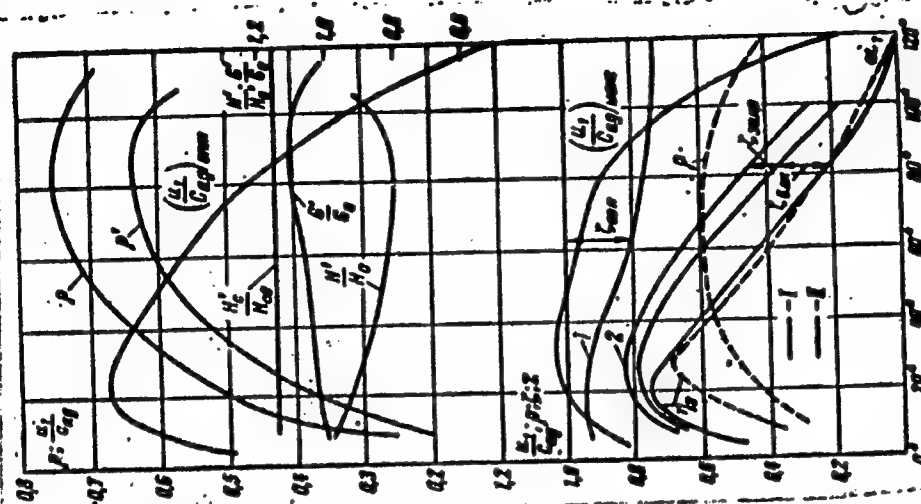


Fig. 1. Turbine characteristics as a function of α_1 . I-turbine with experimental wheel; II-turbine with turbocompressor wheel of type TKR-11.

Card 3/3

YAZIK, A.V., inzh.

Ways for improving the gas feed line of turbocompressors. Trakt.
i sel'khoz mash. no. 11:9-10 N '64. (MIRA 18:1)

1. Khar'kovskiy politekhnicheskii Institut im. V.I. Lenina.

L 45071-66

ACC NR: AP6023675

(N)

SOURCE CODE: UR/0143/66/000/004/0044/0048

AUTHOR: Yazik, A. V. (Candidate of technical sciences)

ORG: Physicomechanical Low Temperature Institute AN UkrSSR (Fiziko-mekhnicheskii institut nizkikh temperatur)

TITLE: Characteristics of a centripetal gas turbine with reverse rotation of the rotor

SOURCE: IVUZ. Energetika, no. 4, 1966, 44-48

TOPIC TAGS: centripetal flow turbine, gas turbine, turbine blade

ABSTRACT: The experimental investigation was made on a centripetal turbine equipped with a nozzle apparatus which could be regulated. The blades in the nozzle apparatus had a symmetric S-4 profile. By rotating the nozzles of the blades, the flow angle could be changed within the limits of 5 to 178°. With this regulation, the inside diameter of the nozzle apparatus did not change by more than 3%. The geometric parameters of the turbine wheel were: outside diameter $d_1 = 125$ mm; diameter at the outlet $d_2 = 86$ mm; the ratio $d_{2av}/d_1 = 0.56$; $B_1/d_1 = 0.09$; the angles of the blades $\beta_{1l} = 90^\circ$, $\beta_{2l} = 40^\circ$; number of vanes $z_K = 16$. The working body in the tests was compressed air with $p_0 =$

UDC: 621.438

Card 1/2

L 45071-66

ACC NR: AP6023675

0.5-1.0 atm, $t \approx 100^\circ\text{C}$. The power of the turbine was adsorbed with a hydraulic brake. The operating conditions of the turbine were characterized by $Re_{c1} \approx 2 \times 10^5$ and $Mo_1 = 0.5-0.6$. It was found that with an increase in the angle of flow, with respect to the optimum value, the efficiency of the turbine decreases in almost direct proportion to the change in the angle of flow. Determinations of the optimum angle of flow were made for different types of turbine wheels. Orig. art. has: 4 formulas and 4 figures.

SUB CODE: 21/ SUBM DATE: 07Jan65/ ORIG REF: 002/ OTH REF: 002

Card 2/2 blg

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001962320007-1

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001962320007-1"

EXCERPTA MEDICA Soc.13 Vol.4/5 Pub.Health, Etc. May 58

YAZIKOV, D.F.

1796. EXPERIENCE OF PREPARATION AND APPLICATION OF INSECTICIDAL LACQUERS AND DYES (Russian text) - Yazikov D. F., Rundquist V. A. and Raigorodskaya V. Y. - Z. MIKROBIOL. 1957, 8 (64-69) Tables 5

For continuous disinsectization of merchant vessels (especially against cockroaches) paints containing insecticides are applied. An oil paint with 1.5% hexachlorocyclohexane, which is harmless for man, was found to be most suitable. To attain a similar effect DDT had to be applied in a 10% concentration. The effect lasts for a few months.

David - Prague

Iz sanitarno-epidemiologicheskii stantsii Leningradskogo morskogo
torgovogo porta.

YALIKOV, D. F.

"Experiment in Gas Processing of Ships at the Leningrad Mercantile Port with Cyclones B and D," by D. F. Yazikov and V. Ya. Raygorodskaya, Leningrad Port Sanitary-Epidemiological Station, Zhurnal Mikrobiologii, Epidemiologii i Immunobiologii, Vol 28, No 2, Feb 57, pp 105-107

The authors report the results of experiments which were conducted to determine the comparative efficiency of the fumigating agents, "cyclone B," "cyclone D," and "cyanplav," when used for the extermination of rats on ships.

"Cyclone B" is in the form of granules of pressed infusorial earth, saturated with hydrocyanic acid. The granules are 0.5x0.4x0.8 centimeters in size, and are kept in tin-plated, hermetically sealed cans 10 centimeters in diameter and 10 centimeters high. The total weight of each can is 600 grams, and each can contains about 200 grams of hydrocyanic acid.

54M.1374

YALIKOV, D.F.

"Cyclone D" is in the form of discs prepared from finely ground paper, and saturated with hydrocyanic acid. The average weight of the disc is 8.07 grams. The discs are kept in tin-plated, hermetically sealed cans 15 centimeters in diameter and 30 centimeters high.

"Cyanplav" is a Soviet-prepared hydrocyanic acid preparation.

The experiments established that "cyclone B" and "cyclone D" are more economical and efficient than "cyanplav"; the rapidity with which "cyclone B" and "cyclone D" liberate hydrocyanic acid permits a smaller expenditure of the chemicals per unit of area to be fumigated. "Cyclone B" and "cyclone D" are simple to use and preclude the necessity of sealing the ship during its fumigation. (U)

54M.1374

YAZIKOV, D.F.
YAZIKOV, D.F.; RAYGORODSKAYA, V.Ya.

Degazation in fumigation of ships with preparations of hydrocyanic acid. Zhur.mikrobiol.epid. i immun. 28 no.8:72-77 Ag '57.
(MIRA 11:2)

1. Iz sanitarno-epidemiologicheskoy stantsii Leningradskogo morskogo
torgovogo porta.

(HYDROCYANIC ACID, effects,

fumigation of ships, degazation (Rus))

(SHIPS,

fumigation with hydrocyanic acid, degazation (Rus))

(INSECTICIDES,

fumigation of ships with hydrocyanic acid, degazation
(Rus))

(RATS,

same

YAZIKOV, D.F., RAYGORODSKAYA, V.Ya.

On P.I. Nikitin and N.I. Pomicheva's article "Testing "Tsiklon"
preparations for disinfecting passenger cars." Gig. i san. 23
no5: 65 My '58 (MIRA 11:6)
(RAILROADS—SANITATION)
(HYDROCYANIC ACID)

YAZIKOV, D.F.; RUNDKVIST, V.A.; RAYGORODSKAYA, V.Ya.

Insecticide effect of hydrocyanic acid preparations in gas fumigation
of ships in Leningrad harbor. Zhur.mikrobiol.epid. i immun. 29
no.4:111-114 Apr '58. (MIRA 11:4)

1. Iz Sanitarno-epidemiologicheskoy stantsii Leningradskogo morskogo
torgovogo porta.

(SHIPS,

fumigation with hydrocyanic acid (Rus)

(HYDROCYANIC ACID,

fumigation of ships (Rus)

YAZIKOV, D.F.

Preparation and use of insecticidal lacquers and paints. Report
No.2: Insecticidal paints containing dieldrin and aldrin. Zhur.
mikrobiol. epid. i immun. 32 no.4:102-108 Ap '61. (MIRA 14:6)

1. Iz Basseynovoy sanitarno-epidemiologicheskoy stantsii Severo-
zapadnogo vodnogo otdela zdravookhraneniya, Leningrad.
(DIELDRIN) (ALDRIN) (INSECTICIDES)

YECHEISTOV, N.K., inzh.; SIDOROV-BIRYUKOV, D.F., inzh.

Electric lighting of crosswalks in Moscow. Svetotekhnika 8
no.12:23-25 D '62. (MIRA 16:1)

1. Gosudarstvennyy proyektno-izyskatel'nyy institut po
stroitel'stvu metropolitenov i transportnykh sooruzheniy.
(Moscow—Street lighting)

YECHEISTOV, Yu.A., kand.tekhn.nauk

Rolling of an automobile wheel on a hard-surface road. Avt.prom.
29 no.3:30-31 Mr '63. (MIRA 16:3)

1. Moskovskiy avtomekhanicheskiy institut.
(Automobiles--Wheels)

YEDAKIN, A.T.

New cutting blade. Mashinostreitel' no.1:29 Ja '62. (MIRA 15:1)
(Cutting machines)

PODOBEDOV, V.V., inzh.; DUBROV, S.Ya., inzh.; SOLOV'YEV, N.Ye., inzh.;
YEDAKOV, V.M., inzh.; KNYAZHANSKAYA, Ye.I., inzh.

Use of the twin drift mining system. Ugol'.prom. no.1:29-34
Ja-F '62. (MIRA 15:8)

1. Normativno-issledovatel'skaya stantsiya Chistyakovskogo tresta
predpriyatiy ugol'noy promyshlennosti Donbassa Ministerstva
ugol'noy promyshlennosti SSSR.

(Coal mines and mining)

YEDAKOVA, V.A.; NEUDACHIN, V.G.; ROMANOVSKIY, Ye.A.

Possibility of the appearance of a second-order process in the case of nonelastic deuteron scattering by nuclei. Zhur. eksp. i teor. fiz. 38 no.1:248-250 Jan '60. (MIRA 14:9)

1. Institut yadernoy fiziki Moskovskogo gosudarstvennogo universiteta.

(Deuterons--Scattering)

YEDED, Ya.

USSR/Chemistry - Heteroatomic compounds

Card 1/1 : Pub. 151 - 17/37

Authors : Efros, L. S.; Kononova, L. N.; and Eded, Ya.

Title : Investigation of imidazole derivatives. Part 13.-Bromination of 1,2-naphthimidoazole

Periodical : Zhur. ob. khim. 24/3, 488-491, Mar 1954

Abstract : The analogy existing between 1,2-naphthimidoazole and phenanthrene during the oxidation, as well as bromination of 1,2-naphthimidoazole, is debated. The two stages of the bromination process - formation of conversion product in position 4 and formation of a labile and easily dissociating addition product - are described. The characteristics of 1,2-naphthimidoazole and their relation to the imidazole ring effect on the bond equilibrium in molecules with condensed nuclei are explained. The possibility of bromination of 1,2-naphthimidoazole in mineral-acid aqueous solutions, as well as in methyl alcohol or ice-cold acetic acid, was established. Four references: 3-USSR and 1-USA (1910-1954).

Institution : The Lenzoviet Technological Institute, Leningrad

Submitted : October 29, 1953

YEDEL'SHTEYN, I.V.

Economic accountability in repair and supply stations. Mekh.sil'.hosp.
9 no.11:14-16 N '58. (MIRA 11:12)

1. Nachal'nik finansovogo upravleniya Ministerstva sel'skogo
khozyaystva USSR.

(Repair and supply stations--Accounting)

ACC NR: AP6009794 SOURCE CODE: UR/0062/000/002/0268/0274 27

AUTHOR: Fedorov, B. P.; Lukovnikov, A. F.; Mamedov, R. H.; Yedemskaya, V. V.; Sukhov, V. A.

ORG: Institute of Chemical Physics, Academy of Sciences SSSR (Institut khimicheskoy fiziki Akademii nauk SSSR); Institute of Organic Chemistry im. N. D. Zelinskiy, Academy of Sciences SSSR (Institut organicheskoy khimii Akademii nauk SSR)

TITLE: Synthesis of some S-substituted 2-(mercaptomethyl)benzimidazoles and a study of their inhibition of polypropylene oxidation

SOURCE: AN SSSR. Izvestiya. Seriya khimicheskaya, no. 2, 1966, 268-274

TOPIC TAGS: polypropylene, oxidation inhibition, polymer additive, benzimidazole derivative


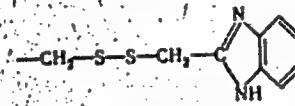


ABSTRACT: Previous work had shown that the effectiveness of 2-mercapto-benzimidazole derivatives as inhibitors of polypropylene oxidation depends on the presence of the sulfhydryl group, or on the nature of the substituents at the sulfhydryl group. The present work deals with the synthesis and properties of S-substituted 2-(mercaptomethyl)benzimidazoles. A number of compounds were prepared and their inhibiting effect on the oxidation of isotactic polypropylene at 200C and pO₂ = 200 mm was investigated. The compounds and the induction periods observed on addition of inhibitors are given in the table:

Card 1/5

L 21560-66

ACC NR: AP6009794

Table 1. Results of measuring induction periods of benzimidazole derivatives





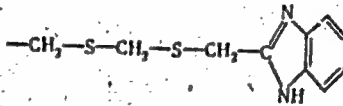
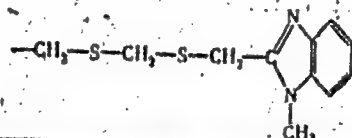
Number	R	mp, °C	Induction period in min. for concentration M/kg			
			0.02	0.05	0.07	1.0
I	-SH	305-308 [1]	55	120	210	265
Ia		228-230 [1]	15	190	270	295
II	-CH ₂ SH	156-158 [2]	45	55	70	80
IIa		180-181 [1]	45	55	50	80
III	-CH(SH)CH ₂ CH ₃	222	10	50	100	150
IV	-CH(SH)CH ₂ CH ₂ CH ₂ CH ₃	209-210	20	25	30	40
V		266-267	12	15	18	35
VI		206-209 [1]	15	38	50	80

Card 2/5

I 31560-66

ACC NR: AP6009794

Table 1. (Cont.)



Number	R	mp, °C	Induction period in min. for con- centration 1/2g			
			0.02	0.05	0.07	1.0
VII		97-98 [2]	20	40	60	90
VIII		218-219 [3]	20	70	80	100
IX		245-247 [3]	30	140	220	300
X		182-183	20	75	90	100
XI		219-220 [3]	10	30	40	40
XII*		207-208	20	30	80	90

Card 3/5

I 21560-66

ACC NR: AP6009794

Table 1. (Cont.)

Number	R	mp, °C	Induction period in min. for con- centration M/kg			
			0.02	0.05	0.07	1.0
XIII	$\text{—CH}_2\text{—S—C(CH}_3)_2\text{—S—CH}_2\text{—C}$ 	223—224	25	55	180	250
XIV	$\text{—CH}_2\text{—S—C(CH}_3)_2\text{—S—CH}_2\text{—C}$ 	249—250	10	10	20	20
XV	$\text{—H}_3\text{C—S—CH}_2\text{CH}_2\text{CH}_2\text{CH}_3$	145—146 [2]	15	18	20	180
XVI	$\text{—H}_3\text{C—S—CH}_2\text{CH}_2\text{CH}_2\text{CH}_3$	132—133	20	340	450	400
XVII	$\text{—H}_3\text{C—S—H}_3\text{C—C}_6\text{H}_5$	141—142 [2]	50	75	100	110
XVIII	$\text{—H}_3\text{C—S—H}_3\text{C—C}_6\text{H}_5$	165—166	30	60	105	120
XIX	$\text{—H}_3\text{C—SO}_2\text{—H}_3\text{C—C}_6\text{H}_5$	206—208	Inactive			

*In (XII) both hydrogen atoms at the NH groups
are replaced by CH₃ groups.

Card 4/5

I 21560-66

ACC NR: AP6009794

The authors found that in the presence of hydroperoxides some amines react with mercaptans to form sulfenamides. They suggest that this may account for the synergistic effects observed when mixtures of amines and mercaptans are used as antioxidants. Orig. art. has: 2 figures and 1 table. [VS]

SUB CODE: 11/07/ SUBM DATE: 12Nov63/ ORIG REF: 006/ OTH REF: 001
ATD PRESS: 4219

Card 5/5

occurrence in the various fractions. The high Conradson number of all the fractions show that they are responsible for the coke formation during hydrogenation, and that the alcohol-insoluble fractions with the

YEDEMSKIY, F.

New design of the bearings of the lower dredger drum. Mor.flot 21
no.3:25-26 Mr '61. (MIRA 14:6)

1. Nachal'nik tekhnicheskogo otdela Taganrofskogo sudoremontnogo
zavoda.

(Dredging machinery)

YEDEMSKIY, L., inzh.

Exhibition in New York. Izv. vys. ucheb. zav.; neft' i gaz 2 no.7:
74 '59. (MIRA 12:12)

1. Rukovoditel' otдела nefti i khimii na Sovetskoy vystavke, New York,
U.S.

(New York--Exhibitions) (Petroleum industry--Exhibitions)
(Chemistry--Exhibitions)

YEDEMSKIY, L.M. [translator]; BASISTOV, A.O., redaktor; MAKAROVA, Ye.M., redaktor; PINYAGIN, N.B., redaktor; ALEMANOVA, N.S., vedushchiy redaktor; TROFIMOV, A.B., tekhnicheskii redaktor

[Technological systems of the processes of refining oil in the United States] Tekhnologicheskii skhemy protsessov pererabotki nefi v SShA. Moskva, Gos. nauchno-tekhn. izd-vo nefianoi i gorno-toplivnoi lit-ry, 1956. 131 p. (MLBA 9:7)

1. Tsentral'nyy nauchno-issledovatel'skiy institut tekhnicheskoy informatsii i ekonomiki nefianoi promyshlennosti.
(United States--Petroleum--Refining)

YEDEMSKIY, P., polkovnik

Inculcation of lofty ethical principles in the students of
military schools. Komm.Vooruzh.Sil 3 no.24:49-52 D '62.
(MIRA 15:12)

(Moral education)

(Military education)

BEZUGLOV, I.Ye.; KURDYUMOV, V.N., inzh.; V rabote prinimali uchastiye:
GABRILENKO, I.V.; GRABOVSKIY, I.I.; NESHCHADIM, A.G.; BELOBORODOV,
V.V.; VISHNEPOL'SKAYA, F.A.; MATSUK, Yu.P.; GAYTSKHOKI, H.I.;
USACHEV, A.S.; ABKINA, H.N.; RUMYANTSEVA, A.G.; KOSHELEV, A.P.;
GRIGOR'YEV, F.L.; LUKASHEVICH, A.M.; STYAZHKINA, A.G.; MIKHAYLOVICH,
A.N.; YEDEMSKIY, P.M.; MASLOV, P.V.; KUDRYASHEVA, Z.P.; PROSMUSHKIN,
R.M.; SHTAL'BERG, V.A.; BOYTSOV, H.I.

Operational experience with a newly introduced oil-extraction line
equipped with the DS-70 belt-conveyer extractor. Masl.-zhir.prom.
26 no.3:29-31 Mr '60. (MIRA 13:6)

1. Vsesoyuznyy nauchno-issledovatel'skiy institut zhirov (for
Bezuglov, Gabrilenko, Grabovskiy, Neshchadim, Beloborodov,
Vishnepol'skaya, Matsuk and Gaytskhoki). 2. Leningradskiy
zhirovoy kombinat (for Kurdyumov, Usachev, Abkina, Rumyantseva,
Koshelev, Grigor'yev, Lukashevich, Styazhkina, Mikhaylovich,
Yedemskiy, Maslov, Kudryasheva, Prosmushkin). 3. Leningradskoye
otdeleniye tresta "Prodmontazh" (for Shtal'berg and Boytsov).
(Leningrad--oils and fats)
(Extraction apparatus)

NESHCHADIM, A.G., inzh.; KURDYUMOV, V.N., inzh.; Prinimali uchastiye:
YEDEMSKIY, P.M.; FADEYEVA, K.M.; SOKOLOV, A.I.; PETROVA, A.I.;
MIKHAYLOVA, N.M.; SERGEYEVA, Z.P.

Influence of temperature on the extraction of prepressed sunflower
cakes in the DS-70 extractor. Masl.-zhir. prom. 27 no.6:35-38
Je '61. (MIRA 14:6)

1. Voronezhskiy tekhnologicheskii institut, Leningradskoye otdeleniye
(for Neshchadim). 2. Leningradskiy maslozhirovoy kombinat (for
Kurdyumov, Yedemskiy, Fadeyeva, Sokolov, Petrova, Mikhaylova, Sergeyeva).
(Sunflower oil)

BEZUGLOV, I.Ye.; YEDEMSKIY, P.M., inzh.

Treatment of palm nuts (kernels) by the prepressing-continuous
extraction flow sheet. Masl.-zhir.prom. 28 no.7:34-37
Jl '62. (MIRA 15:11)

1. Vsesoyuznyy nauchno-issledovatel'skiy institut
zhиров (for Bezuglov). 2. Leningradskiy maslozhirovoy
kombinat (for Yedemskiy).

(Leningrad--Oils and fats)
(Palm oil)

NESHCHADIM, A.G., inzh.; Prinimali uchastiye: FADEYEVA, K.M., inzh.;
YEDEMSKIY, P.M., inzh.; MIKHAYLOVICH, A.N., inzh.; YEMEL'YANOVA,
Z.I., inzh.

Nonisothermal step extraction with the yield of high concentra-
tion micelles. Masl.-zhir.prom. 28 no.12:9-13 D '62.

(MIRA 16:1)

1. Vsesoyuznyy zaachnyy institut pishchevoy promyshlennosti
(for Neshchadim). 2. Leningradskiy maslozhirovoy kombinat
(for Fadeyeva, Yedemskiy, Mikhaylovich). 3. Leningradskoye
otdeleniye Voronezhskogo tekhnologicheskogo instituta (for
Yemel'yanova).

(Oils and fats)

(Extraction (Chemistry))

DIVEYEV, R.Kh.; GORELOV, Ye.P., kand. sel'skokhoz. nauk; YEDGAROV, D.

Intensive use of irrigated Sierozems. Zemledelie 26 no.9:12-13
S '64. (MIRA 17:11)

1. Samarkandskiy sel'skokhozyaystvennyy institut (for Diveyev, Gorelov).
2. Glavnyy agronom sovkhoza "Dagbid" Poyaryyskogo proizvodstvennogo upravleniya, Samarkandskoy oblasti (for Diveyev).
3. Samarkandskaya zonal'naya opyt'naya stantsiya (for Yedgarov).

YEDIDOVICH, B.; KURASHOV, V.

A necessary reference book for field workers ("A manual for work
norm specialists on oil well drilling and the extraction of oil."
P. Goliakov, IA. Gurevich, S. Kozyrev. Reviewed by B. Edidovich, V.
Kurashov). Sots.trud. no.5:120-121 My '56. (MLRA 9:8)
(Oil well drilling--Production standards)
(Goliakov, P.) (Gurevich, IA.) (Kozyrev, S.)

YEDIDOVICH, V.

Device for lapping machine parts. Stan. 1 instr. 26 no.10:33 Q'55.
(Grinding and polishing) (MLRA 9:1).

YEDIDOVICH, Valentin Andreyevich, inzhener; IL'CHUK, Vladimir Yefimovich;
RUTSINSKIY, Pavel Nikolayevich; TKACHENKO, Filogeniy Dmitriyevich,
kandidat tekhnicheskikh nauk; RYSIN, A.Ye., inzhener, redaktor;
YUDSON, D.M., tekhnicheskiy redaktor.

[Centralized lubrication of locomotives] TSentralizovannaya smazka
porevovozov. Moskva, Gos.transp.shel-der.izd-vo, 1956. 126 p.
(Locomotives--Lubrication) (MIRA 9:6)

YEDIDOVICH, V.N., kapitan 2-go ranga

Search for new forms of special training of the personnel. Mor.
sbor. 46 no.5:44-46 My '63. (MIRA 16:4)
(Naval education) (Radio, Military)

VEDIDOVICH, Ye. S.

Pharmacy

Standard expenditures of accessory materials in pharmacies. Apt. delo 2, No. 1, 1953.

Monthly List of Russian Accessions, Library of Congress, June 1953. Uncl.

YEDIDOVICH, Ye.S.

Health education as one of the most important tasks of pharmacy workers. Apt.delo 4 no.2:34-36 Mr-Apr '55. (MLRA 8:5)

1. Iz laboratorii organizatsii i ekonomiki aptechnogo dela Tsentral'nogo nauchno-issledovatel'skogo aptechnogo instituta GAFU Ministerstva zdravookhraneniya SSSR.

(HEALTH, education,

in Russia, role of pharm. workers)

(PHARMACY,

in Russia, role of pharm. workers in health educ.)

YEDIDOVICH, Ye.S., kandidat farmatsevticheskikh nauk; KRASNEV, T.F.
~~Inzhener-konstruktor.~~

The use of machines for industrial processes in pharmacies.
Apt.delo 4 no.3:10-13 My-Je '55. (MLRA 8:8)

1. Iz laboratorii organizatsii i ekonomiki aptechnogo dela
Tsentral'nogo nauchno-issledovatel'skogo aptechnogo instituta
Glavnogo aptechnogo upravleniya Ministerstva zdravookhraneniya
SSSR.

(DRUG INDUSTRY,
in Russia, mechanization)

YEDIDOVICH, Ye.S., kandidat farmatsevticheskikh nauk; PREOBRAZHENSKIY, A.M.,
professor, redaktor.

[Concise dictionary of medical terms] Kratkiy slovar' meditsinskikh
terminov. Moskva, 1956. 136 p. (MLRA 9:5)
(MEDICINE--DICTIONARIES)(RUSSIAN LANGUAGE--DICTIONARIES)

YEDIG, G. G.

Dissertation defended for the degree of Candidate of Philological Sciences
at the Institute of Linguistics

"Subordinate Clauses of the Low-German Dialect of the Altay Kray."

Vestnik Akad. Nauk, No. 4, 1963, pp 119-145

AVILOV, V.I.; YEDIGAROV, G.M.

Reinforcing deep prospecting wells with liners. Burenie no.1:
11-13 '65. (MIRA 18:5)

1. Prikumskaya kontora razvedochnogo bureniya.

YEDIGAROV, G.N.

High-pressure single-phase gathering system for oil wells. Transp.
i khran. نفتي no.5:21-23 '63. (MIRA 17:3)

1. Tatnefteproyekt.

RUBINSHTEYN, Ya.M., doktor tekhnicheskikh nauk; GRIBKOV, M.N., inzhener;
YEDIGAREV, I.V.

Results of modernizing the BP-25-1 turbine produced by the Kharkov.
turbogenerator works. Teploenergetika 4 no.9:3-7 S '57. (MLRA 10:8)

1. Vsesoyuznyy teplotekhnicheskii institut.
(Turbogenerators)

SOV/96-58-5-1/27

AUTHORS: Rubinshteyn, Ya.M., Doctor of Technical Sciences,
Gribkov, M.N., Komarov, N.F. and Yedigarev, L.V., Engineers

TITLE: Results of Modernisation of Turbines, Type SVK-150 of the
Leningrad Metal Works (Rezultaty modernizatsii turbiny
tipa SVK-150 IMZ)

PERIODICAL: Teploenergetika, 1958, Nr 5, pp 3 - 9 (USSR).

ABSTRACT: Test results on the first turbine, type SVK-150,
published in Teploenergetika, 1956, nr 8, showed that its heat
consumption was 3% above the guarantee figure. Accordingly,
the design of the similar turbine Nr 3 for the Cherepet
Power Station was modernised and the steam conditions were
altered to 170 atm. and 570 °C with reheat to 525 °C. The
improvements consisted of providing stationary and working
blades of new aerodynamic profiles for all stages of the high-
pressure cylinder. The double-row regulating stage was devel-
oped on the basis of the MEI (Moscow Power Institute) data.
A 9th stage was installed in the high-pressure cylinder.
Various constructional improvements and some alterations to the
thermal circuit were also made. To determine the effectiveness
of these measures, the VTI (All-Union Thermotechnical Institute)
made tests at Cherepet GRES (Cherepet Power Station)
on turbine Nr 3, type SVK-150, in April- June, 1957.

Card 1/7

SOV/96-58-5-1/27

Results of Modernisation of Turbines Type SVK-150 of the Leningrad Metal Works

The thermal circuit of the turbine set is given in Figure 1 which shows the point at which measurements were made. The test conditions and measurements are then described in some detail. The intended tests with and without the regenerative circuit in operation as well as heat-balance tests could not be run in the purely condensing condition and only four tests were made with the high-pressure heaters disconnected. Details are given of the parts of the equipment that were operating, the type of measuring instruments used and various special features of the operating conditions.

In order to determine the thermal characteristics of the turbine, the results of heat-balance tests with the regenerative system in operation were referred to the designed steam conditions of 170 atm. and 550 °C.

The test results for turbine Nr 3 were compared with those for turbine Nr 1, the prototype on the basis of the guarantee conditions for the latter. In particular, the steam temperature after reheat and the consumption of feedwater for reheat injection were taken from the same calculated data as for Nr 1.

Card 2/7

SOV/96-58-5-1/27
Results of Modernisation of Turbines Type SVK-150 of the Leningrad
Metal Works

Steam- and heat-consumption figures as functions of power output for turbine Nr 3 are plotted in Figure 2. The specific heat-consumption for Nr 1 is also indicated, by dotted lines. The data relate to the use of two boilers, i.e. with steam consumption exceeding 240 tons/hour. Turbine efficiency figures for three operating conditions are recorded in Table 1, which shows a mean improvement in efficiency for the three conditions of the order of 2.1%. Table 2 compares the heat-consumption of turbine Nr 3 with the works guarantee figures when the steam conditions are 170 atm. and 550 °C, and the steam at the inlet to the medium-pressure cylinder is at the designed temperature. For the three test conditions on nr 3, the heat-consumption exceeds the guarantee figure (without tolerance) by 1.1%, as against 3% for Nr 1. The improved heat-consumption of Nr 3 is mainly due to the increased efficiencies of the high- and medium-pressure cylinders, the better operation of the steam ejectors from the first tapping and the new labyrinth glands. The reasons for the improvement are then analysed in more detail.

Pressure losses in the stop valves are rather high. The

Card3/7

SOV/96-58-5-1/27

Results of Modernisation of Turbines Type SVK-150 of the Leningrad Metal Works

effect on the efficiency of opening successive nozzle valves is shown on Figure 5; comparative results for turbine nr 1 are also given. Figure 6 gives curves of the relative internal efficiency of the high-pressure cylinder as a function of the steam consumption. Modernisation of the flow path of the turbine has improved the efficiency of the high-pressure cylinder, with three valves open, by 7%. This is achieved mainly by the use of improved blade profiles and the addition of one pressure-stage. Tests were made with 2, 3 and 4 valves fully open and gave efficiencies of 74.7, 78.8 and 79.3% respectively.

The relative internal efficiency of the medium-pressure cylinder, plotted in Figure 7, remains constant at 89.5% over a wide load range. This is 1.2% higher than for turbine Nr 1 and is due to small changes and better manufacture of the flow path of the cylinder.

Because the thermal circuit of the turbine is complicated, estimates of the heat content of the exhaust steam are approximate. However, as the curve of the internal efficiency of the low-pressure cylinder, given in Figure 8, accords with

Card4/7

SOV/96-58-5-1/27

Results of Modernisation of Turbines Type SVK-150 of the Leningrad Metal Works

the values determined for turbine nr 1, there is reason to suppose that the experimental values are nearly correct. Greater precision would entail special tests. With a steam flow to the condenser of 305 tons/hour, the test efficiency of the low-pressure cylinder is 66% (referred to a rated condenser pressure of 0.03 atm.). As this is 10% less than the calculated figure, the turbine would be expected to have an excess heat-consumption of 1.8%. The quantity of steam withdrawn from the labyrinth glands and valve-boxes of turbines nrs 1 and 3 are given in Table 3. For turbine Nr 3, the quantity is 2.6 tons/hour less than for turbine nr 1, which reduces the specific heat consumption by 0.2%. High-pressure heaters Nrs 5, 6 and 7 and low-pressure heaters Nrs 3, 4, worked very satisfactorily but the drainage coolers for high-pressure heaters Nrs 6 and 7 are quite ineffective, and that for nr 5 merely reduces the temperature by about 10 °C. In low-pressure heaters Nrs 1 and 2, the final temperature heads are very great (10 - 14 °C) because of high leakage of air into the system and poor de-aeration.

Under operating conditions there are a number of other adverse

Card5/7

SOV/96-58-5-1/27

Results of Modernisation of Turbines Type SVK-150 of the Leningrad Metal Works

factors that were not present during the tests. One is leakage of air into the vacuum system. Also, the quantity of steam supplied to the glands is 1 ton/hour more than it should be and the feedwater consumption for reheat temperature regulation is high (up to 20 tons/hour).

It is concluded that modernisation has improved the heat consumption of the turbine by an average of 2.1%, mainly by increasing the efficiency of the high-pressure cylinder by 6 - 10% at steam consumptions of 300 - 460 tons/hour and by raising the efficiency of the medium-pressure cylinder by 1.2%. The efficiency of the turbine is less than the guarantee figure but is within the tolerance. The next step is to improve the efficiency of the low-pressure cylinder and also to reduce pressure losses in the stop valve of the medium-pressure cylinder, which constitute about 25% of the total pressure-drop on the reheat system.

Card 6/7

SOV/96-58-5-1/27

Results of Modernisation of Turbines Type SVK-150 of the Leningrad
Metal Works

There are 8 figures, 3 tables and 1 Soviet reference.

ASSOCIATION: VTI

Card 7/7 1. Turbines--Design 2. Turbines--Performance

12/27/20

Eds. (title page): Dr. M. Eshelbarya, Professor, and A. V. Shchegolev, Associate Professor, Academy of Sciences USSR (Moscow, U.S.S.R.).

COMMENT: This collection of 22 articles deals with aspects of American foreign policy, particularly, variations in the foreign policy of the United States and the cooperation of citizens in the foreign policy of the United States. The articles and a number of them deal with the way in which the United States has been able to influence the foreign policy of other nations. The articles are arranged in a logical order.

13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525
 526
 527
 528
 529
 530
 531
 532
 533
 534
 535

The undersigned, James M. Smith, of the County of Jefferson, State of Missouri, do hereby certify that the within and foregoing is a true and correct copy of the original as the same appears from the records of the County of Jefferson, State of Missouri.

The author defines the "noise-value" coefficient. If ΔQ is the (normal) heat Q is added to a thermodynamic system, the entropy S of the system increases, the change in the latter being denoted by ΔS (used in deriving the above and in the following calculations). The coefficient $\Delta S / \Delta Q$ is denoted as $\Delta S / \Delta Q$ and designated as $\Delta S / \Delta Q$. The heat Q is denoted as Q . The symbol $\Delta S / \Delta Q$ represents the heat Q and the coefficient $\Delta S / \Delta Q$ and specific values of $\Delta S / \Delta Q$ and $\Delta S / \Delta Q$ are denoted with corresponding values for systems and the number with corresponding values for systems and the number

Wm. and L. Y. Ziegler, 220 Lexington St., Boston.

The authors discuss the optimum arrangement of the feedback paths of a system to achieve maximum effectiveness and stability of the system. The authors also discuss the optimum arrangement of the feedback paths of a system to achieve maximum effectiveness and stability of the system.

Majority R.F. Certain Problems Related to the Control-System Stability of
of certain structures operating in parallel
The problem of constant speed regulation and the stability of the
the interconnecting system for multigenerators operating in parallel
is analyzed.

Calypso, L.I. Methods of Births Controlling in Compensated Control 99

[illegible]

Wells, V.L. System of single-step hydrolysis and control. The article deals with current systems of hydraulic speed-response governing with one pump and a pressure relay. Four different arrangements of such servomotors are described.

127
Emmens, G.L. Experimental Investigation of the Effects of
Friction in the Governor on the Flywheel Motion
Analysis of the work done by the governor against Inertial
friction is presented, and the effects of friction on the Close-
down curve are evaluated.

Waller, V. L., R. K. Levin, and T. V. Rabinovich. Control Value of the VZ
Turbine
Functions and performance of the new type of admission valve de-
signed to regulate the rate of flow in the main governor of
turbine. These turbine are discussed.

Margary, R.P. Influence of the Pump-Stroke Ratio on Pump-Performance Characteristics in a Hydrodynamic Downward System
An experimental model of a centrifugal pump in hydraulic overpressure is described. The geometry of the pump rotor and the effects of different parameters are analyzed with regard to the effect of

YEDIGAREV, Ye. V.

YEDIGAREV, Ye. V. -- "Investigation of the Dust Content in Mines of the Moscow Coal Basin and Ways of Reducing It." Acad Sci USSR. Inst of Mining. Moscow, 1955. (Dissertation for the Degree of Candidate of Technical Sciences.)

SO: Knizhnaya Letopis', No 5, Moscow, Feb 1956

YEDIGAREV, Ye.V., kand.tekhn.nauk

Dust control in a mining combine of the Moscow Basin by
installation of an air screen. Bor'ba s sil. 3:124-128
'59. (MIRA 12:9)

(MOSCOW BASIN--MINE DUSTS) (AIR CURTAINS)

~~Y~~EDIGAROV, A. N.


EDIGAROV, A. N.

From the Russian for Mr. Ernest M. Allen
(photocopy of) Sovetskaya Meditsina (7): 31-33; 1954.

Bourgeois Venereology at an Impasse
by

e. D. Ashurkov (candidate of medical sciences) and L. I. Fandeev.

(From the N.A. Semashko Institute of the Public Health Organization and Medical History
of the Academy of Medical Sciences of the USSR (Dir.: E.D. Ashurkov) and from the Chair
of Skin and Venereal Diseases (Head: L.I. Fandeev) of the Kaunas Medical Institute
(Dir.: A.N. Edigarov).)

Translated at the National Institutes of Health, Bethesda, Maryland.
Full translation available in /M.

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001962320007-1

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001962320007-1"

Subject : USSR/Engineering AID P - 346
Card : 1/1
Author : Yedigarov, S. G.
Title : Blowing-out of a gas pipeline by means of portable compressors
Periodical : Neft. Khoz., v. 32, #5, 85-86, My 1954
Abstract : The method of sectional blowing-out of gas or oil pipelines is described. The regional pipeline is usually divided in different sections (about 15-20 km). Each section is cleaned separately by air pressure. 2 figures.
Institution : None
Submitted : No date

YEDIGAROV, S. G.

"Hydraulic Calculations of Filling of Highly Viscous Petroleum Products from Railroad Tank Cars." Min Higher Education, Moscow Order of Labor Red Banner Petroleum Inst imeni Academician I. M. Gubkin, Moscow, 1955. (Dissertation for the Degree of Candidate of Technical Sciences)

SO: M-972, 20 Feb 56

SOV/124-58-3-2966

Translation from: Referativnyy zhurnal, Mekhanika, 1958, Nr 3, p 60 (USSR)

AUTHORS: Asaturyan, A. Sh., Yedigarov, S. G., Chernikin, V. I.

TITLE: The Laminar Motion of Viscous Petroleum Products in Rectangular Heated Channels (Laminarnoye dvizheniye vyazkikh nefteproduktov v pryamougol'nykh obogrevayemykh kanalakh)

PERIODICAL: Tr. Akad. neft. prom-sti, 1956, Nr 3, pp 254-259

ABSTRACT: The article examines the plane steady-state laminar uniform flow of viscous fluid in an open channel with a heated bottom. The calculation is made in accordance with the Navier-Stokes equation, with separate consideration of the heated fluid moving along the bottom of the channel and the cold fluid moving along its upper part. At the interface between the cold and the hot fluids, the velocities and friction stresses are conjugated. An equation is obtained for the over-all discharge of the fluid. An explanation is presented of the equation obtained, and a numerical example is given.

Card 1/1

Ye. M. Minskiy

YEDIGAROV, S. G.

Asaturyan, A. Sh., S. G. Yedigarov, and V. I. Chernikin.

"Isothermal Flow of Viscous Liquids in Open Rectangular Channels"

"Hydromechanical Transportation of Viscous Crude Oil Through Open Rectangular Channels"

Problems of Petroleum Production and Petroleum Engineering, Moscow, Neftyanoy
institut, Gostoptekhnizdat, 1957, 393pp. (Trudy vyp. 20)
This book is a collection of articles written by professors and faculty members
of the Petroleum Inst. im I. M. Gubkin.

YEDIGAROV, S.G.

SOV/124-58-5-5433

Translation from: Referativnyy zhurnal, Mekhanika, 1958, Nr 5, p 69 (USSR)

AUTHORS: Yedigarov, S.G., Asaturyan, A.Sh.

TITLE: Determining the Time Required to Empty Railroad Tank Cars of Viscous Petroleum Products by Gravity Flow. A Short Survey of Investigations Performed to Date. (Opredeleniye vremeni oporozheniya zheleznodorozhnykh tsistern pri samotechnom slive vyazkikh nefteproduktov. Kratkiy obzor sushchestvuyushchikh issledovaniy)

PERIODICAL: Tr. Ufimsk. nef. n.-i. in-t, 1957, Nr 2, pp 219-233

ABSTRACT: Bibliographic entry

1. Railroad cars--Performance
2. Petroleum--Handling
3. Plastic flow--Velocity

Card 1/1

SOV/124-58-11-12702

Translation from: Referativnyy zhurnal, Mekhanika, 1958, Nr 11, p 111 (USSR)

AUTHORS: Asaturyan, A. Sh., Yedigarov, S. G., Chernikin, V. I.

TITLE: Isothermal Flow of Viscous Liquids in Open Rectangular Channels
(Izotermicheskoye techeniye vyzkikh zhidkostey v otkrytykh
pryamougol'nykh kanalakh)

PERIODICAL: Tr. Mosk. neft. in-ta, 1957, Nr 20, pp 305-313

ABSTRACT: An examination of the problem of the laminar flow of an incompressible viscous liquid in an inclined rectangular channel. The solution is based on approximate equations of motion of the viscous liquid, in which all inertia terms and terms containing velocity terms that are perpendicular to the center line of the channel are disregarded; here we may from the outset consider $dp/dx=0$ in equation (4), which follows from (6). With this setup and with the boundary conditions assumed by the author, the problem coincides fully with the problem on the flow of a viscous liquid in a rectangular pipe examined by Boussinesq (J. math. pures et appl., 1868, Vol 13, p 377) and the solution obtained by the authors merely reproduces Boussinesq's results. In the conclusions the authors investigate the discharge formula obtained, which coincides with Boussinesq's formula, and compare it with other calculation formulas by means of numerical computation. Bibliography: 8 references.

Card 1/1

S. M. Targ

ASATURYAN, A.Sh., mladshiy nauchnyy sotrudnik; YEDIGAROV, S.G., dotsent;
CHERNIKIN, V.I., prof.

Subaqueous transportation of viscous petroleum in rectangular
open channels. Trudy MNI no.20:314-321 '57.
(MIRA 13:5)

(Petroleum--Transportation)

SOV/24-58-7-20/36

AUTHORS: Asaturyan, A.Sh., Yedigarov, S.G. and Chernikin, V.I.
(Ufa, Moscow)

TITLE: The Motion of Immiscible Liquids of Differing Densities
Along a Rectangular Open Channel (Dvizheniye nesmeshi-
vayushchikhsya zhidkostey razlichnogo udel'nogo vesa po
priyamougol'nym otkrytym kanalām)

PERIODICAL: Izvestiya Akademii nauk SSSR, Otdeleniye tekhnicheskikh
nauk, 1958, Nr 7, pp 115 - 116 (USSR)

ABSTRACT: Oil floating on water is discussed; the solution given
is exact for laminar flows in both liquids. Fourier
expansion methods are used to give series which converge
rapidly for the flows; one or two terms are adequate
for practical purposes. A simple numerical example is
used to show how much more rapidly a viscous oil can
be transported in this way. There are 1 figure and
1 Soviet reference.

SUBMITTED: November 26, 1957

Card 1/1

YEDIGAROV, S.G.; RASHCHETKIN, K.Ye.; OVCHINNIKOV, I.S.

Complete mechanization of major repairs of pipelines. Neft.
khoz. 40 no.10:55-62 0 '62. (MIRA 16:7)

(Pipelines—Maintenance and repair)